

### FHG60135 Series

Slip rings of the FHG60135 series are specially design for IP65~68 water-proof and dust-proof slip ring, Grand applies noble precious metal reduced noises and interference between circuits, low friction torque assures long life-span. FHG60135 series with through hole 60mm, OD135mm, suitable for rotating application which requires a through hole  $\leq 60\text{mm}$ , Standard model supports 1-48 power rings(0-20A/ring) or 1-96 signal rings(0~5A/ring).

### Features

- ◆ Waterproof slip ring, IP68, can work underwater of 1500M deep ocean, mainly applied to ships and oil wells.
- ◆ Multi-point brush contact material ensure long life
- ◆ Anti-corrosion stainless steel housing for better protection
- ◆ Integrated structure design for easy installation
- ◆ Standard model and customization are available
- ◆ Standard model supports 1-96rings power or signal(0~20A/ring)
- ◆ Free maintenance

### Typical applications

- ◆ Automatic machines
- ◆ Cable reels
- ◆ Robotics, rotary sensors, urgent illumination equipment
- ◆ Exhibit / display equipment
- ◆ Packaging
- ◆ Rotary table
- ◆ Medical,Pharmaceutical equipment
- ◆ Converting machines
- ◆ Capping machines
- ◆ Labeling machines
- ◆ Filling machine
- ◆ Machine tools


### Options

- ◆ No. of rings
- ◆ Current &voltage
- ◆ Connector
- ◆ Housing material
- ◆ Position of wire outlet, wire length
- ◆ Flange mounting is optional
- ◆ Operating temperature
- ◆ Support mixed high speed data transmission(including Ethernet, USB, Profibus, Ethernet, CANOPEN, CANBUS, RS232, RS485, etc.)
- ◆ Fluidic rotary joints, FORJ and electric slip ring can be mixed.

## Specifications

Electrical Data		Mechanical Data	
No of rings	1~72rings	Inner Diameter	60mm
Rated Voltage	0~240 VAC/VDC	Outer Diameter	135mm
Rated Current	5A/ring,10A/ring, 15A/ring,20A/ring	Working Speed	0-250rpm
Lead Size	Sliver plated Teflon colour coded AWG22(5A), AWG16(10A), AWG14(15A/20A)	Working Temperature	-40°C~+80°C
Lead Length	Standard 500mm (adjustable)	Working Humidity	60% RH or higher
Dielectric Strength	500VAC@50HZ,60S	Housing Material	Aluminum alloy
Insulation Resistance	500MΩ/500VDC	Contact material	Precious material
Electrical Noise	<0.01Ω	IP rating	IP65~IP68

## Drawing for Outline Dimension

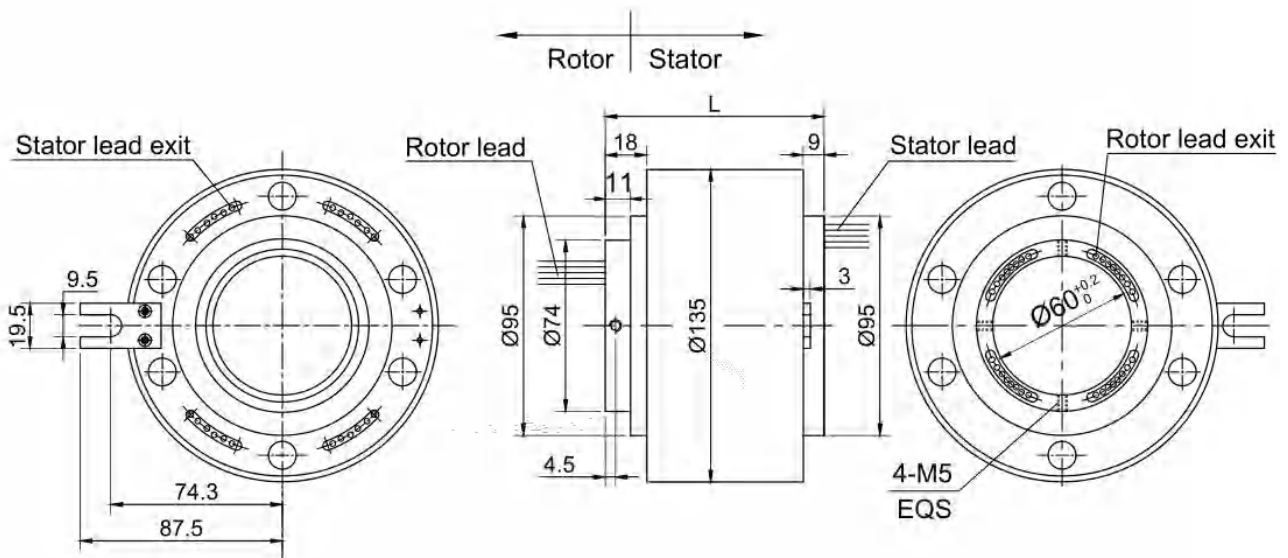

## Model List

Model	Power Ring (10A/15A/20A)	Signal Ring(5A)	Length (mm)
FHG60135-6P	6	-	95
FHG60135-12S	-	12	95
FHG60135-12P	12	-	125
FHG60135-6P/12S	6	12	125
FHG60135-24S	-	24	125
FHG60135-18P	18	-	155
FHG60135-12P/12S	12	12	155
FHG60135-6P/24S	6	24	155

FHG60135-36S	-	36	155
FHG60135-24P	24	-	185
FHG60135-18P/12S	18	12	185
FHG60135-12P/24S	12	24	185
FHG60135-6P/36S	6	36	185
FHG60135-48S	-	48	185
FHG60135-30P	30	-	215
FHG60135-24P/12S	24	12	215
FHG60135-18P/24S	18	24	215
FHG60135-12P/36S	12	36	215
FHG60135-6P/48S	6	48	215
FHG60135-60S	-	60	215
FHG60135-36P	36	-	245
FHG60135-30P/12S	30	12	245
FHG60135-24P/24S	24	24	245
FHG60135-18P/36S	18	36	245
FHG60135-12P/48S	12	48	245
FHG60135-6P/60S	6	60	245
FHG60135-72S	-	72	245
FHG60135-42P	42	-	275
FHG60135-36P/12S	36	12	275
FHG60135-30P/24S	30	24	275
FHG60135-24P/36S	24	36	275
FHG60135-18P/48S	18	48	275
FHG60135-12P/60S	12	60	275
FHG60135-6P/72S	6	72	275
FHG60135-84S	-	84	275
FHG60135-48P	48	-	305
FHG60135-42P/12S	42	12	305
FHG60135-36P/24S	36	24	305
FHG60135-30P/36S	30	36	305
FHG60135-24P/48S	24	48	305
FHG60135-18P/60S	18	60	305
FHG60135-12P/72S	12	72	305
FHG60135-6P/84S	6	84	305
FHG60135-96S	-	96	305